

Please type a plus (+) inside this box → +

PTO/SB/29 (12/97)

Approved for use through 09/30/00. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

8932-146

Total Pages

24

First Named Inventor or Application Identifier

P. WEAVER et al.

Express Mail Label No.

N/A

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form
Submit an original, and a duplicate for fee processing
2. ☒ Specification [Total Pages 13]
(preferred arrangement set forth below)
 - Descriptive title of the Invention
 - Cross Reference to Related Applications
 - Statement Regarding Fed sponsored R&D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings *(if filed)*
 - Detailed Description of the Invention *(including drawings, if filed)*
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Formal Drawing(s) (35 USC 113) [Total Sheets 9 (26 Figs.)]
4. ☒ Declaration & Power of Attorney [Total Sheets 2]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
 - i. ☐ **DELETION OF INVENTORS(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33 (b).
5. ☐ Incorporation By Reference *(useable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity ☐ Statement filed in prior application, Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: filed .

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

20582

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

ADDRESS

CITY

STATE

ZIP CODE

COUNTRY

TELEPHONE

FAX

PENNIE & EDMONDS LLP
COUNSELLORS AT LAW
1667 K Street, N.W.
Washington, D.C. 20006
(202) 496-4400

ATTORNEY DOCKET NO. **8932-146**

Date: September 12, 2000

Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

The following utility patent application is enclosed for filing:

Applicant(s): **Paul C. WEAVER; Jeff W. MAST; Keith A. MAYO; Brett R. BOLHOFNER; and David LITTLE**

Executed on: August 22, 30, September 5, August 24,
and 22, 2000


Title of Invention: **BONE PLATING SYSTEM**

PATENT APPLICATION FEE VALUE

TYPE	NO. FILED	LESS	EXTRA	EXTRA RATE	FEE
Total Claims	18	-20	0	\$18.00 each	\$ 0.00
Independent	2	-3	0	\$78.00 each	\$ 0.00
Minimum Fee					\$ 690.00
Multiple Dependency Fee If Applicable (\$260.00)					\$ 0.00
Total					\$ 690.00
50% Reduction for Independent Inventor, Nonprofit Organization or Small Business Concern (a verified statement as to the applicant's status is attached)					- \$ 0.00
Total Filing Fee					\$ 690.00

- ☒ Priority of Provisional Application No. **60/153,239** filed on **September 13, 1999** is claimed under 35 U.S.C. § 119(e).
- ☒ Please charge the required fee to Pennie & Edmonds LLP Deposit Account No. 16-1150. A copy of this sheet is enclosed.

Respectfully submitted,



For
Paul D. Bianco
Allan A. Fanucci
PENNIE & EDMONDS LLP

Reg. No. 43,500
Reg. No. 30,256

Enclosures

BONE PLATING SYSTEM

Cross-Reference to Related Applications

5 The benefit of Provisional Application No. 60/153,239 filed on September 13, 1999 is claimed under 35 U.S.C. § 119(e).

Field of the Invention

10 The present invention is directed to a bone plating system for fracture fixation, and in particular to a system including a bone plate having plate holes for both locking and non-locking screws.

Background of the Invention

002750 28209960
15 The clinical success of plate and screw systems for internal fixation of fractures is well-documented. However, treatment of certain fractures, such as peri-articular fractures, which require a fixed angular relationship between the bone plate and screws, remains problematic. Fixed angle devices for treatment of these fractures are available and include the Dynamic Condylar Screw System commercially available from Synthes (USA) of Paoli, PA and a wide variety of blade plates. All of these devices require a high level of surgical skill, suitable bone quantity and quality, and a fracture pattern compatible with the device.

20 In cases in which these requirements are not satisfied, *e.g.* severely comminuted bone or missing bone segments, conventional bone plate and screw systems must be used. Although these conventional systems are particularly well-suited to promoting healing of the fracture by compressing the fracture ends together and drawing the bone into close apposition with other fragments and the bone plate, the angular relationships between the plate and screws are not fixed and can change postoperatively. This can lead to mal-
25 alignment and poor clinical results.

The primary mechanism for the change in angular relationship is related to energy storage. As previously noted, threading a bone screw into bone compresses the bone against the plate. The compression results in high strain in the bone, and, consequently,
30 energy storage. With the dynamic loading resulting from physiological conditions, loosening of the plate and screw and loss of the stored energy can result.

Securing the screws to the plate provides a fixed angle relationship between the plate and screw and reduces the incidence of loosening. One method of securing the screw to the plate involves the use of so-called "locking screws." A locking screw has threading
35 on an outer surface of its head that mates with corresponding threading on the surface of a plate hole to lock the screw to the plate. Bone plates having threaded holes for

accommodating locking screws are known. For example, German Patent Application No. 43 43 117 discloses a bone plate with threaded holes for locking screws. As the relationship between the locking screws and the plate is fixed, locking screws provide a high resistance to shear or torsional forces. However, locking screws have a limited capability to compress bone fragments.

In summary, conventional bone screws, *i.e.* screws that are not secured to a plate so that a fixed angular relationship between the plate and screw is maintained (hereinafter “non-locking screws”) effectively compress bone fragments, but possess a low resistance to shear force that can lead to loosening of the screw. Locking screws have a high resistance to shear force that ensure stability at the bone screw/plate hole interface, but possess a limited ability to compress bone fragments. Thus, a bone plating system that combines non-locking screws with locking screws would be ideal for certain clinical situations.

U.S. Patent No. 5,601,553 discloses a locking plate and bone screw. The plate has a plurality of threaded plate holes for receiving locking screws. The plate also has non-threaded plate holes for receiving temporary screws that keep the plate in place while the locking screws are inserted. After the locking screws are inserted, the temporary screws are removed. Thus, the long term benefits of combining non-locking screws with locking screws are not obtained. U.S. Patent No. 5,709,686 discloses a bone plate with partially threaded plate holes. The partially threaded holes allow either non-locking or locking screws to be used. Because the plate holes are only partially threaded, the locking screws used may not be able to maintain the fixed angular relationship between the screws and plate under physiological loads. Specifically, the locking screws within the plate are only partially captivated and thus only partially surrounded by threads. Under high stress and loading conditions, the locking plate hole may distort and allow the fixed angular relationship between the locking screw and plate to change. This can result in loss of fixation or loss of established intraoperative plate orientation. Additionally, because of the plate hole geometry, translation of the plate with the non-locking screws is limited to one direction only. This may be a disadvantage in reduction and manipulation of fragments.

Thus, there exists a need for an improved bone plating system that overcomes the deficiencies of the prior art.

Summary of the Invention

The bone plating system for fixation of bone according to the present invention includes a bone plate having an upper surface, a bone-contacting surface, at least one first hole passing through the upper and bone-contacting surfaces and having a thread, and at least one second hole passing through the upper and bone-contacting surfaces. The bone

plating system also includes a first screw having a shaft with a thread for engaging bone and a head with a thread configured and dimensioned to mate with the thread of the first hole, and a second screw having a shaft with a thread for engaging bone and a head. The first and second screws remain seated in their respective holes for substantially as long as the bone
5 plate is implanted. Preferably, the bone plate includes a plurality of first and second holes, and a corresponding plurality of first and second screws are provided.

In order to facilitate insertion, the first and second screws can be a self-tapping screws. These screws can also be self-drilling screws. Additionally, the first and second screws can be cannulated for insertion of a guide wire to guide screw placement. The first 10 plate hole can have a substantially conical shape with a double-lead thread.

In one embodiment, the bone plate has a trapezoidal shaped cross section in regions between the first and second plate holes for minimizing contact between bone and the bone-contacting surface. Additionally, at least one of the second plate holes is longitudinally elongated and has an edge inclined at an angle to the upper surface toward the bone-

15 contacting surface for displacing the bone plate when engaged by the head of a second bone screw.

In an exemplary embodiment, the bone plate includes a head portion configured and dimensioned to conform to a metaphysis of a bone and a shaft portion configured and dimensioned to conform to a diaphysis of a bone. The head portion has only first plate holes and the shaft portion has both first and second plate holes. In one embodiment, the head portion has a curved surface, includes an anterior fork substantially parallel to an anterior side of the shaft portion, and includes a posterior fork extending out from a posterior side of the shaft portion. In another embodiment, the head portion flares outward from the shaft portion and is curved, tapered, and twisted. The head portion can also be provided with suture holes from suture anchoring of the bone plate.

The method for fracture fixation of bone according to the present invention comprises the steps of reducing the fracture to bring bone fragments in close apposition; compressing a bone plate against the bone with at least one first fastener to hold the fracture reduction; and securing at least one second fastener at a fixed angular relationship to the bone plate. The first fasteners are inserted before the second fasteners and both the first and second fasteners remain in bone for substantially as long as the bone plate is implanted.

Brief Description of the Drawings

FIG. 1 is a side view of one embodiment of a non-locking screw according to the
35 present invention;

FIG. 2 is a side view of one embodiment of a locking screw according to the present invention;

FIG. 3 is a perspective view of a portion of a bone plate according to the present invention;

5 FIG. 4 shows a cross-sectional view of one of the first plate holes through line 4-4 of FIG. 3;

FIG. 5 shows a cross-sectional view of one of the second plate holes through line 5-5 of FIG. 3;

10 FIG. 6 shows another cross-sectional view of the second plate hole of FIG. 5 through line 6-6 of FIG. 3;

FIG. 7 shows a top view of an embodiment of a bone plate according to the present invention designed for use in the distal femur;

FIG. 8 shows a side view of the bone plate of FIG. 7;

15 FIG. 9 shows a perspective view of the bone plate of FIG. 7 implanted in a distal femur;

FIG. 10 shows a top view of the bone plate of FIG. 7 with various cross sections labeled;

FIG. 11 shows a cross-section of the bone plate of FIG. 7 through line A-A;

FIG. 12 shows a cross-section of the bone plate of FIG. 7 through line B-B;

20 FIG. 13 shows a cross-section of the bone plate of FIG. 7 through line C-C;

FIG. 14 shows a cross-section of the bone plate of FIG. 7 through line D-D;

FIG. 15 shows a cross-section of the bone plate of FIG. 7 through line E-E;

FIG. 16 shows a cross-section of the bone plate of FIG. 7 through line F-F;

FIG. 17 shows a cross-section of the bone plate of FIG. 7 through line G-G;

25 FIG. 18 shows a cross-section of the bone plate of FIG. 7 through line H-H;

FIG. 19 shows a cross-section of the bone plate of FIG. 7 through line I-I

FIG. 20 shows a side view of an embodiment of a bone plate according to the present invention designed for use in the proximal tibia;

FIG. 21 shows a top view of the bone plate of FIG. 20;

30 FIG. 22 shows a perspective view of the bone plate of FIG. 20 implanted in a proximal tibia;

FIG. 23 shows an end view of the bone plate of FIG. 20 with various cross sections labeled;

FIG. 24 shows a cross-section of the bone plate of FIG. 21 through line A-A;

35 FIG. 25 shows a cross-section of the bone plate of FIG. 21 through line I-I; and

FIG. 26 shows a cross-section of the bone plate of FIG. 21 through line D-D.

Description of the Preferred Embodiments

The bone plating system according to the present invention includes a bone plate, non-locking screws, and locking screws. FIG. 1 shows an example of a non-locking screw 10 that can be used with the present invention. In general and as described in more detail below, any surgical screw that has a non-threaded head 12 of an appropriate size and geometry for select plate holes of the bone plate can be used. Non-locking screw 10 has a shaft 14 that is at least partially threaded for attachment to bone. The length of shaft 14 and the shaft thread configuration can be selected for the particular application. As is well known in the art, the threads and a tip 16 can be made to be self-tapping and/or self-drilling to facilitate implantation. Shaft 14 can also be cannulated with a channel for receiving a guide wire to aid in proper placement.

FIG. 2 shows an example of a locking screw 20 that can be used with the present invention. In general and as described in more detail below, any surgical screw that has a head 22 with threads 24 can be used as long as head 22 is of an appropriate size and geometry for select plate holes of the bone plate and threads 24 mate with the threads of the plate holes. Locking screw 20 has a shaft 26 that is at least partially threaded for attachment to bone. The length of shaft 26 and the shaft thread configuration can be selected for the particular application. As is well known in the art, the threads and a tip 28 can be made to be self-tapping and/or self-drilling to facilitate implantation. Shaft 26 can be cannulated for receiving a guide wire.

FIG. 3 shows a portion of a bone plate 30 according to the present invention. Bone plate 30 can be made in different shapes and sizes for use in a wide variety of clinical applications. Bone plate 30 includes an upper surface 32 and a bone contacting surface 34. Bone plate 30 has a plurality of first plate holes 36 and a plurality of second plate holes 38. Each of first and second plate holes 36, 38 passes through upper 32 and bone-contacting surfaces 34. Each first plate hole 36 has a thread 40 that mates with thread 24 on head 22 of locking screw 20 to secure locking screw 20 to bone plate 30 at a temporally fixed angular orientation. Second plate holes 38 are not threaded and receive non-locking screws 10 with non-threaded heads 12. Insertion of non-locking screws 10 in second plate holes 38 draws the bone toward bone-contacting surface 34 to compress the bone. Thus, seating of non-locking screws 10 in second plate holes 38 compresses the bone against bone-contacting surface 34 and seating of locking screws 20 in first plate holes 36 secures heads 22 to bone plate 30 for maintaining a fixed angular relationship between locking screws 20 and bone plate 30. Simultaneous use of bone plate 30 with both non-locking and locking screws 10, 20 for as long as bone plate 30 is implanted provides stability between both the screw and bone plate and between the bone plate and bone. As non-locking screws 10 are generally

secured in cancellous bone, the threads on shaft 14 are typically larger than the threads on shaft 26 of locking screws 20.

First plate holes 36 are preferably conical in shape. As shown in FIG. 4, threads 40 on first plate holes 36 are also preferably double lead threads. The double lead conical threads enables multiple threads to engage while maintaining a low profile. Additionally, the double lead conical threads are less susceptible to cross-threading compared to other threads, *e.g.* cylindrical threaded arrangements.

As seen best in FIGS. 5 and 6, second plate holes 38 are preferably dynamic compression unit (DCU) screw holes substantially similar to those disclosed in reissued U.S. Patent No. Re. 31,628 to Allgower *et al.*, the contents of which are incorporated herein by reference. The DCU screw holes promote healing of the bone by compressing the fracture ends together. Briefly, second plate holes 38 have an edge 42 which includes an oblique portion or ramp 44 having an inclination such that when ramp 44 is engaged by the underside of head 12 of non-locking screw 10, bone plate 30 is displaced in a direction to move ramp 44 away from non-locking screw 10 and to cause bone plate 30 to apply a pressure to hold the fracture ends in tight engagement.

Bone-contacting surface 34 on bone plate 30 can be shaped to minimize contact with bone. Limiting contact between the bone plate and bone has a number of biological and mechanical advantages including reduced damage to blood supply and easier plate removal. Providing bone plate 30 with a trapezoidal cross section (FIG. 11) in the regions between first and second plate holes 34, 36 is one way to minimize contact. Other ways are disclosed in U.S. Patent Nos. 5,151,103; 5,053,036; 5,002,544; and 4,838,252. The contents of these patents are incorporated herein by reference.

By combining locking screws and non-locking screws on the same bone plate, the present invention provides a novel mixed fixation. With the non-locking screws, fracture reduction is held by friction between the bone plate and bone. This friction is generated by tightening the non-locking screws in bone. However, micromotion between the non-locking screws and bone leads to bone resorption, and loss of reduction. Additionally, insertion of the non-locking screws requires bone to withstand the stresses of tightening of the screws. This results in high stress in bone surrounding the non-locking screws. Ordinarily, the high stress can cause the non-locking screw threads to strip (threads in bone fail in shear) and/or creep in bone (since bone is a viscoelastic material). Either one of these phenomenon also results in loss of reduction.

By adding at least one locking screw, loss of reduction is minimized or eliminated by the present invention. Specifically, by securing the locking screws to the bone plate and not the bone, the effect of the viscoelastic behavior of bone is reduced, the threads do not

strip, and micromotion is prevented. The attachment between the locking screws and bone plate is a high strength connection in which the locking screw must cut sideways through bone to fail.

As management of certain peri-articular fractures typically involves insertion of screws at various angles with respect to the bone plate and it is highly desirable to maintain the initial angular relationships between the individual screws and the bone plate, the bone plating system according to the present invention is particularly well-suited for these clinical applications. FIGS. 7-19 show a bone plate 50 according to the present invention specifically designed for use in the distal femur. Bone plate 50 would be used primarily for, but not limited to, severely comminuted fractures including Hoffa type fractures.

Bone plate 50 has an upper surface 52 and a bone-contacting surface 54. Bone plate 50 has a plurality of threaded plate holes 56a, 56b, 56c (collectively referred to as threaded plate holes 56) for receiving locking screws 20 and a plurality of non-threaded plate holes 58 for receiving non-locking screws 10. Each of threaded and non-threaded plate holes 56, 58 passes through upper 52 and bone-contacting surfaces 54. As was the case for bone plate 30, the thread on threaded plate holes 56 mates with threaded head 22 of locking screw 20 to secure locking screw 20 to bone plate 50 at a temporally fixed angular orientation and insertion of non-locking screws 10 in non-threaded plate holes 58 draws the bone toward bone-contacting surface 54 to compress the bone.

Bone plate 50 includes a head portion 60 configured and dimensioned to conform to the metaphysis of the distal femur and a shaft portion 62 configured and dimensioned to conform to a diaphysis of a bone. As best seen in FIG. 8, bone contacting surface 54 of head portion 60 is a curved surface to fit the contours of the distal femur. Head portion 60 includes an anterior fork 64 substantially parallel to an anterior side 66 of shaft portion 62 and a posterior fork 68 extending laterally out from a posterior side 70 of shaft portion 62.

The non-threaded plate holes 58 are preferably dynamic compression unit (DCU) screw holes substantially similar to second plate holes 38. Shaft portion 62 has both threaded plate holes 56a and non-threaded plate holes 58 so that both locking and non-locking screws can be used in shaft portion 62. The ability to use locking screws in shaft portion 62 is particularly useful when the far cortex of part of the diaphysis is missing or severely damaged since fixation with non-locking screws is problematic because of the condition of the far cortex. As best seen in FIG. 11, the regions between threaded and non-threaded plate holes 56a, 58 have a trapezoidal cross section that limits contact between bone-contacting surface 54 of shaft portion 62 and the femur. Shaft portion 62 terminates in a tapered tail 72 (FIG. 19).

In contrast to shaft portion 62, head portion 60 contains only threaded holes 56. Specifically, threaded plate holes 56b that surround a centrally located threaded plate hole 56c. Threaded plate hole 56c has a larger diameter than threaded plate holes 56b to accommodate a locking screw with a larger diameter, *e.g.* threaded plate hole 56b have a diameter of 5.0 mm and threaded plate hole 56c has a diameter of 7.3 mm. FIGS. 12-18 show the various angular orientations of the individual threaded holes 56b, 56c. In generally, threaded holes 56b, 56c are arranged so that the inserted locking screws converge towards each other. It should be noted that, if a surgeon elects, non-locking screws can be used in any of threaded plate holes 56. Finally, it should also be noted that bone plate 50 has several structural differences from the condylar buttress plate commercially available from Synthes (U.S.A.) of Paoli, Pennsylvania. For example, the head of the condylar buttress plate is contoured in both the longitudinal and transverse directions while head portion 60 of bone plate 50 is contoured only in the longitudinal direction for a more anatomical fit. Additionally, tail 72 has an elevated end to get under tissue.

FIGS. 20-26 show a bone plate 80 according to the present invention specifically designed for use in the proximal tibia. Bone plate 80 would be primarily used for, but not limited to fractures of the lateral proximal tibial plateau. Bone plate 80 has an upper surface 82 and a bone-contacting surface 84. Bone plate 80 has a plurality of threaded plate holes 86a, 86b and 86c (collectively referred to as threaded plate holes 86) for receiving locking screws 20 and a plurality of non-threaded plate holes 88 for receiving non-locking screws 10. Each of threaded and non-threaded plate holes 86 and 88 pass through upper 82 and bone-contacting surfaces 84. As was the case for bone plate 30, the threads on threaded plate holes 86 mate with the threaded head 22 of locking screw 20 to secure locking screw 20 to bone plate 80 at a fixed angular orientation. Insertion of non-locking screws 10 in non-threaded plate holes 88 draws the bone-contacting surface 84 toward the bone to compress the plate to the bone.

Bone plate 80 includes a head portion 90 configured and dimensioned to conform to the metaphysis of the lateral proximal tibia and a shaft portion 92 configured and dimensioned to conform to a diaphysis of the lateral proximal tibia. As seen in FIGS. 20 and 26, bone contacting surface 84 of head portion 90 is a curved, tapered, and twisted to fit the contours of the lateral proximal tibial plateau. Head portion 90 also features sutures holes for suture anchoring and for provisional fixation of bone plate 80.

The non-threaded plate holes 88 are preferably dynamic compression unit (DCU) screw holes substantially similar to second plate holes 38. Shaft portion 92 has both threaded plate holes 86a and non-threaded plate holes 88 so that both locking and non-locking screws can be used in shaft portion 92. The ability to use locking screws in shaft

portion 92 is particularly useful when the far cortex of part of the diaphysis is missing or severely damaged since fixation with non-locking screws is problematic because of the condition of the far cortex. As best seen in FIG. 24, the regions between threaded and non-threaded plate holes 86a and 88 have a rectangular cross section that limits contact between bone-contacting surface 84 of shaft portion 92 and the tibia. Shaft portion 92 terminates in a tapered tail 102 (FIG. 25).

In similar fashion to shaft portion 92, head portion 90 contains threaded holes 86 and non-threaded holes 88. Head portion 90 features threaded plate holes 86b and 86c. Holes 86b and 86c have a diameter of 5.0 mm and are oriented as shown in FIGS. 23 and 26. In general, threaded holes 86b, 86c are arranged so that the inserted locking screws converge towards each other. As shown in FIG. 23, plate holes 86b are oriented to converge at a predetermined distance from plate surface 84 to optimize the position of locking screws 20 within the tibia plateau. As shown in FIG 26, plate hole 86c is oriented to converge with plate hole 86b at predetermined distance to provide additional stability to the locked fixed-angle construct. It should be noted that if a surgeon elects, non-locking screws can be used in any of threaded plate holes 86.

While it is apparent that the illustrative embodiments of the invention herein disclosed fulfil the objectives stated above, it will be appreciated that numerous modifications and other embodiments may be devised by those skilled in the art. For example, for some fractures only one first plate hole and one second plate hole are needed, although at least two of each is advantageous. Furthermore, additional plate holes without screws can be present in the plate, if desired to allow the surgeon further flexibility in use. Therefore, it will be understood that the appended claims are intended to cover all such modifications and embodiments which come within the spirit and scope of the present invention.

The Claims

What is claimed is:

- 5 1. A bone plating system for fixation of bone comprising:
a bone plate having:
 an upper surface;
 a bone-contacting surface;
 at least one first hole passing through the upper and bone-contacting surfaces and
10 having a thread; and
 at least one second hole passing through the upper and bone-contacting surfaces;
a first screw having a shaft with a thread for engaging bone and a head with a thread
configured and dimensioned to mate with the thread of the first hole; and
a second screw having a shaft with a thread for engaging bone and a head,
15 wherein the first and second screws remain seated in their respective holes for substantially
as long as the bone plate is implanted.
2. The bone plating system of claim 1 wherein the bone plate includes a
plurality of first and second holes, and a corresponding plurality of first and second screws
20 are provided.
3. The bone plating system of claim 1 wherein the first screw is a self-tapping
screw.
- 25 4. The bone plating system of claim 3 wherein the first screw is a self-drilling
screw.
5. The bone plating system of claim 1 wherein the first screw is cannulated for
insertion of a guide wire to guide screw placement.
30 6. The bone plating system of claim 1 wherein the second screw is a self-
tapping screw.
7. The bone plating system of claim 1 wherein the first plate hole has a
35 substantially conical shape.

8. The bone plating system of claim 7 wherein the first plate hole has a double-lead thread.

9. The bone plating system of claim 1 wherein the bone plate has a trapezoidal shaped cross section in regions between the first and second plate holes for minimizing contact between bone and the bone-contacting surface.

10. The bone plating system of claim 2 wherein at least one of the second plate holes is longitudinally elongated and has an edge inclined at an angle to the upper surface toward the bone-contacting surface for displacing the bone plate when engaged by the head of a second bone screw.

11. The bone plating system of claim 2 wherein the bone plate includes a head portion configured and dimensioned to conform to a metaphysis of a bone and a shaft portion configured and dimensioned to conform to a diaphysis of a bone.

12. The bone plating system of claim 11 wherein the head portion has only first plate holes.

13. The bone plating system of claim 11 wherein the shaft portion has both first and second plate holes.

14. The bone plating system of claim 11 wherein the head portion has a curved surface, includes an anterior fork substantially parallel to an anterior side of the shaft portion, and includes a posterior fork extending out from a posterior side of the shaft portion.

15. The bone plating system of claim 11 wherein the shaft has a trapezoidal shaped cross section in regions between the first and second screw holes for minimizing contact between bone and the bone-contacting surface.

16. The bone plating system of claim 11 wherein the head portion flares outward from the shaft.

17. The bone plating system of claim 15 wherein the head portion is provided with suture holes.

18. A method for fracture fixation of bone comprising the steps of:
reducing the fracture to bring bone fragments in close apposition;
compressing a bone plate against the bone with at least one first fastener to hold the
fracture reduction; and

5 securing at least one second fastener at a fixed angular relationship to the bone plate,
wherein the at least one first fastener is inserted before the at least one second fastener and
the at least one first fastener and the at least one second fastener remain in bone for
substantially as long as the bone plate is implanted.

10

15

20

25

30

35

BONE PLATING SYSTEM

ABSTRACT

5 The present invention relates to a bone plating system and method for fracture
fixation of bone. The bone plating system includes a bone plate, at least one locking screw,
and at least one non-locking screw. The bone plate has locking holes with threads and non-
locking holes. The locking screws have a shaft with a thread for engaging bone and a head
with a thread configured and dimensioned to mate with the thread of the locking holes. The
non-locking screws have a thread for engaging bone and a non-threaded head. Both the
10 locking and non-locking screws remain seated in their respective holes for substantially as
long as the bone plate is implanted. The non-locking screws compress the bone plate
against the bone and hold fracture reduction while the locking screws are secured to the
plate at a fixed angular relationship. The mixed fixation achieved by this bone plating
system and method is particularly useful for treatment of per-articular fractures.

15

20

25

30

35

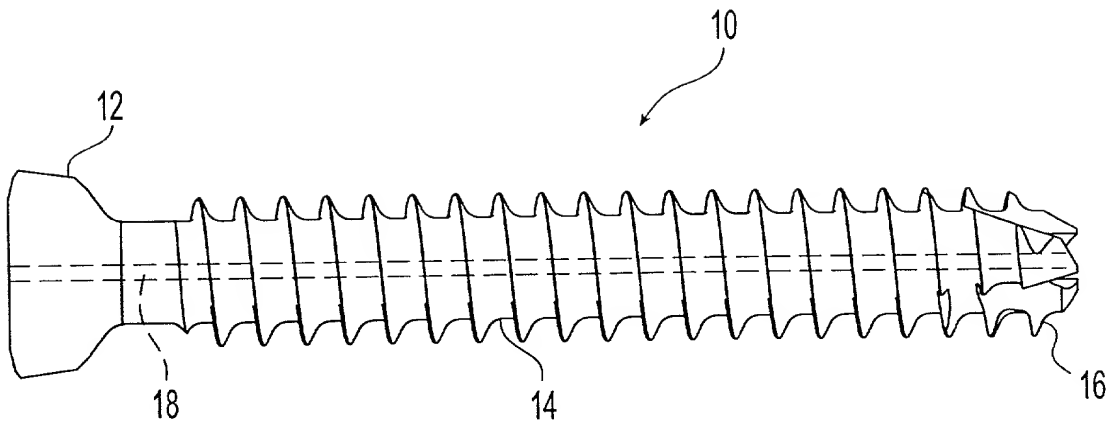


Fig. 1

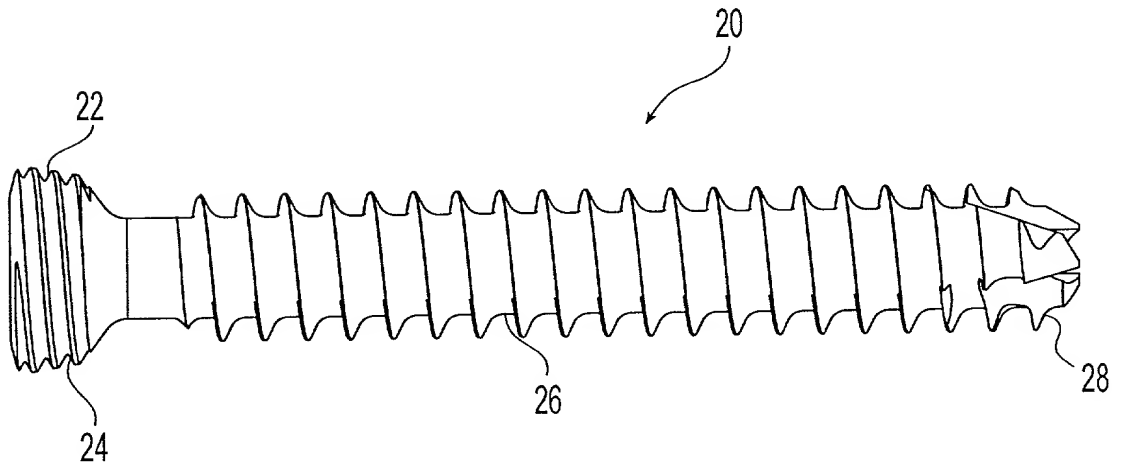


Fig. 2

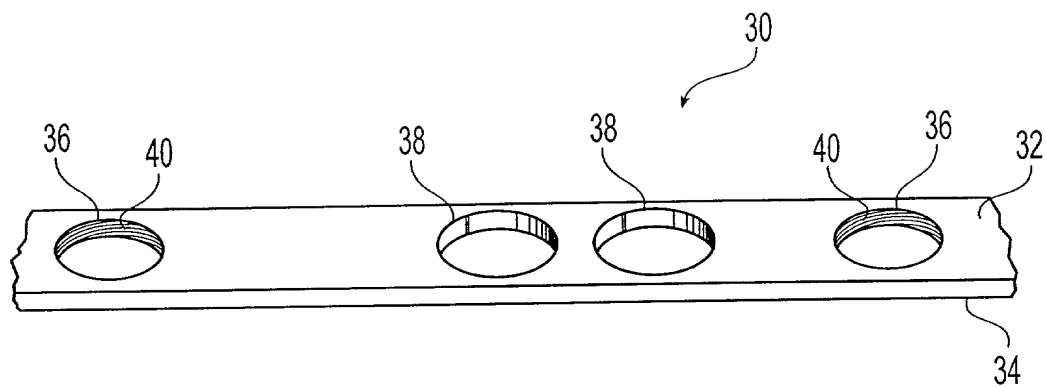


Fig. 3

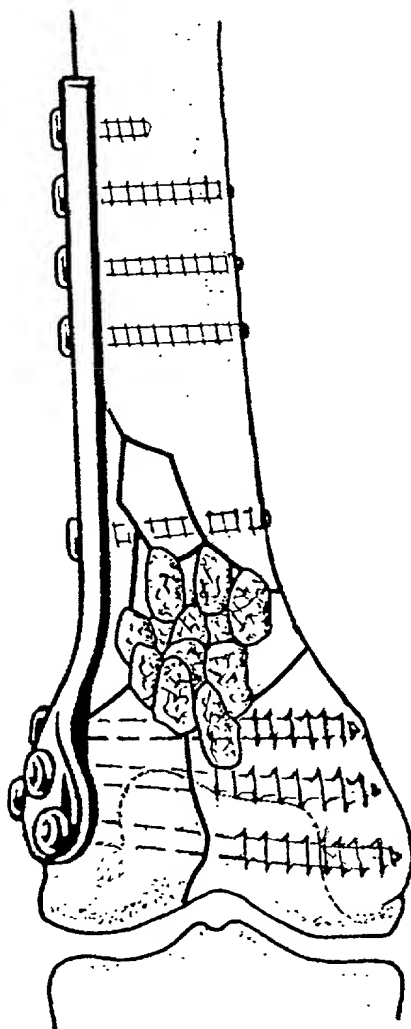


Fig. 9

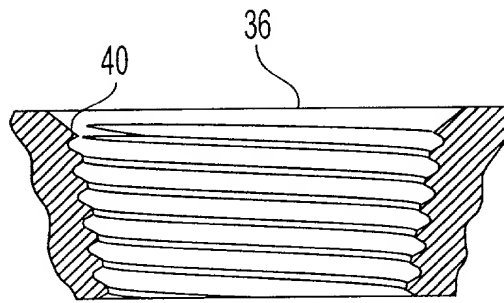


Fig. 4

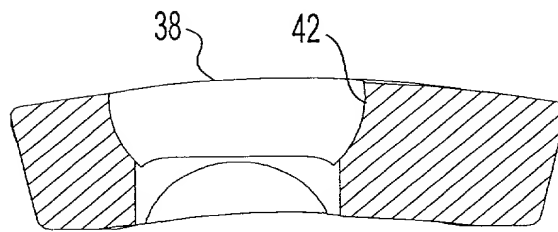


Fig. 5

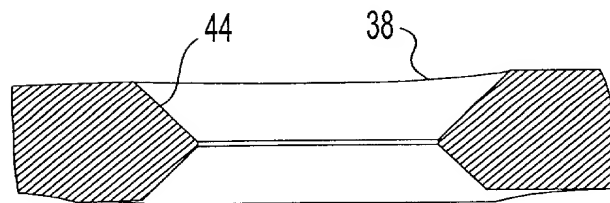


Fig. 6

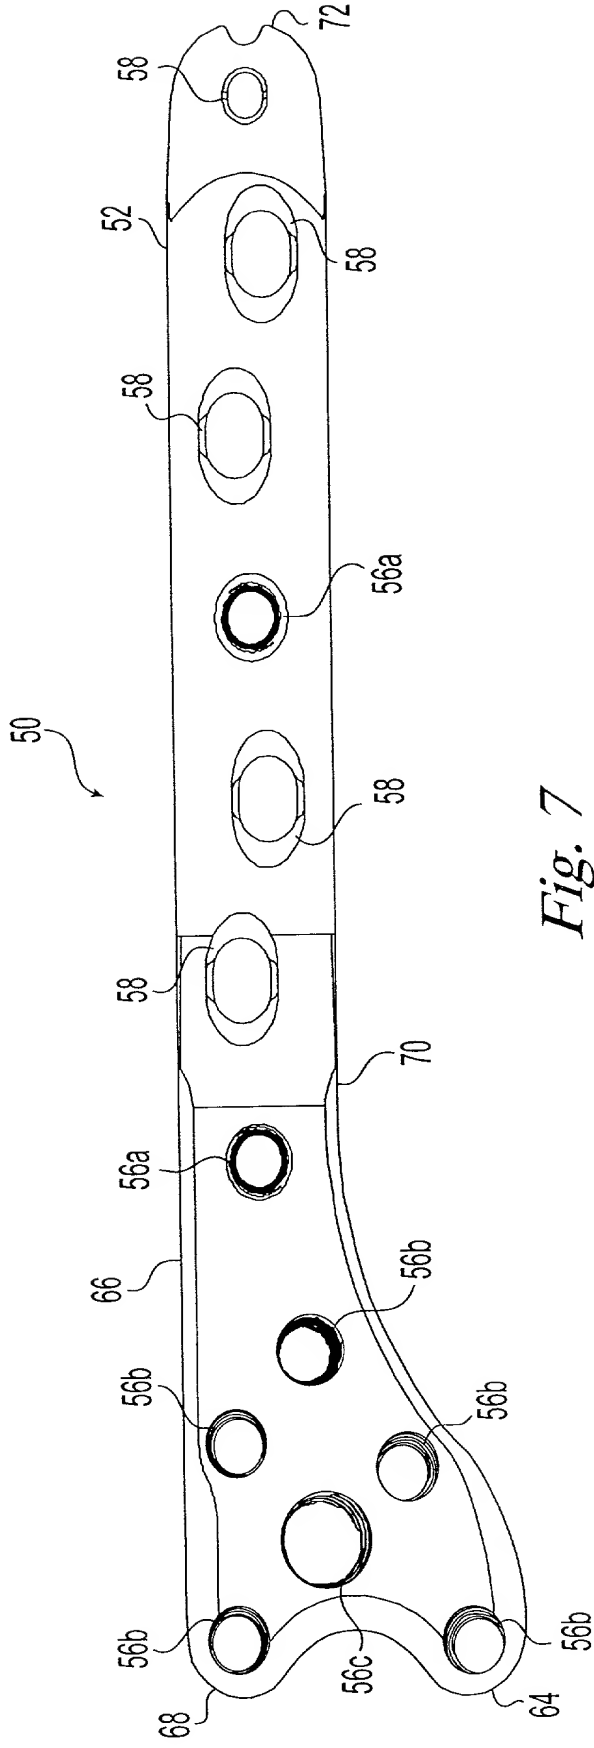


Fig. 7

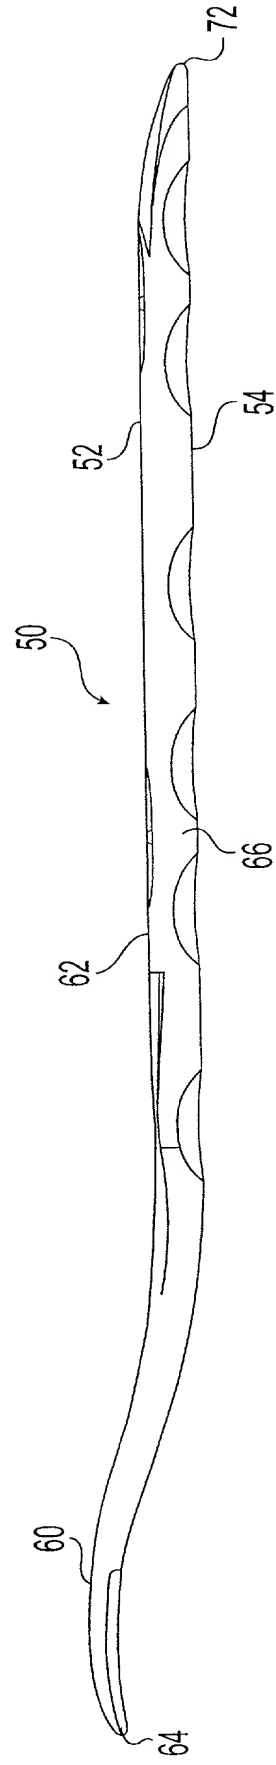


Fig. 8

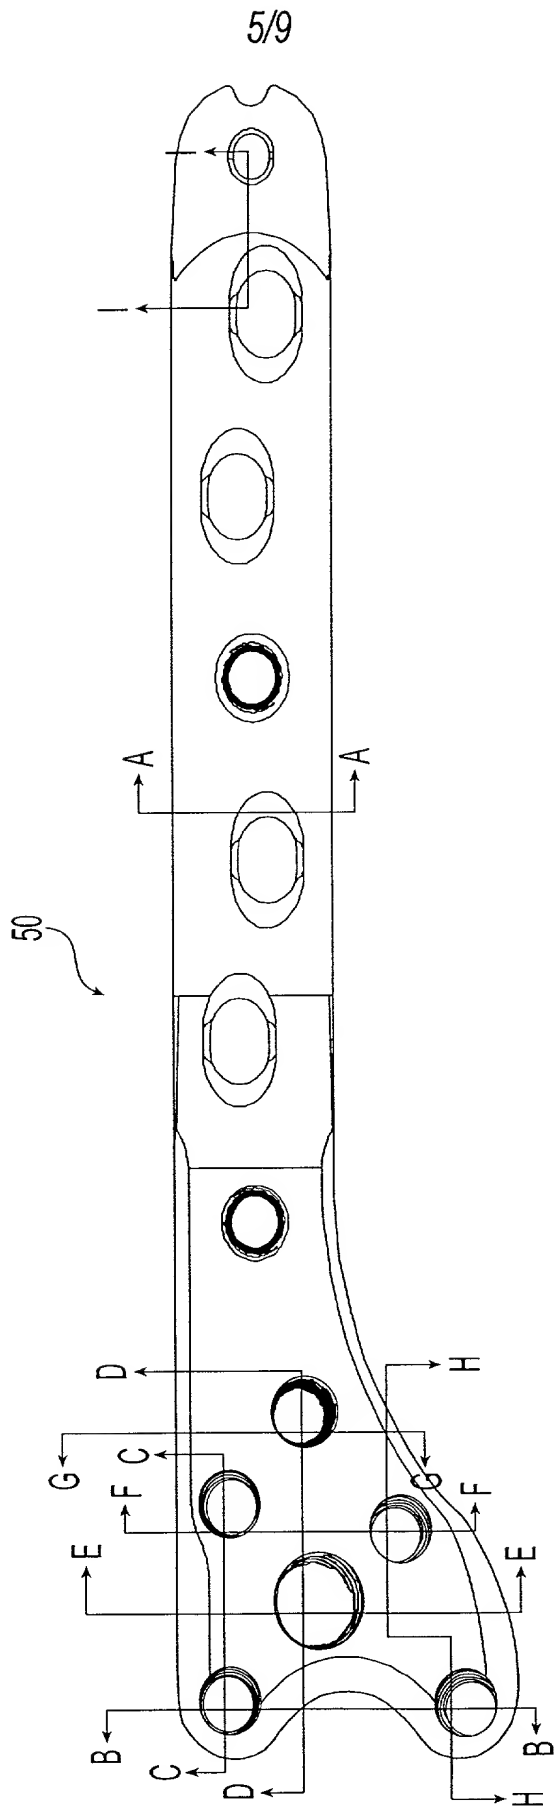


Fig. 10

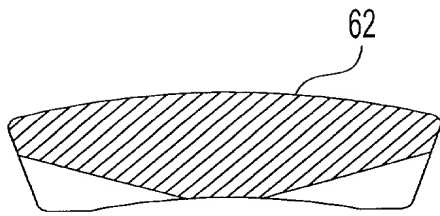


Fig. 11

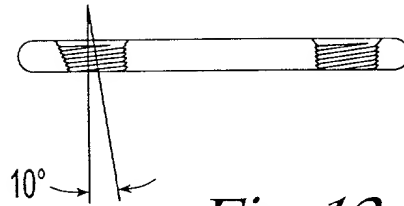


Fig. 12

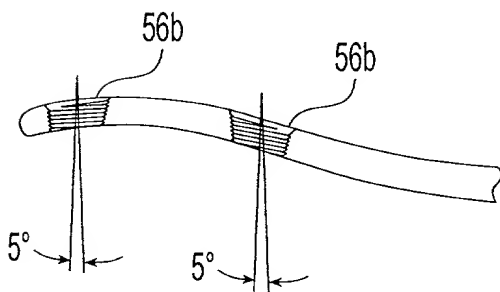


Fig. 13

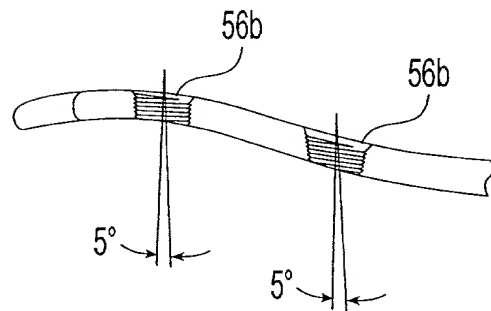


Fig. 14

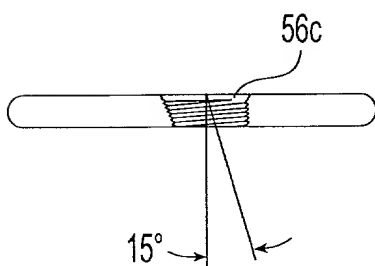


Fig. 15

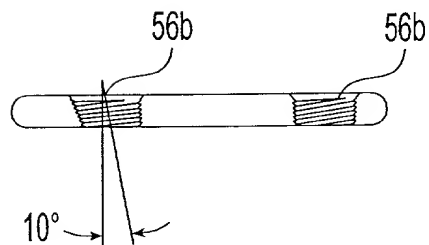


Fig. 16




Fig. 17

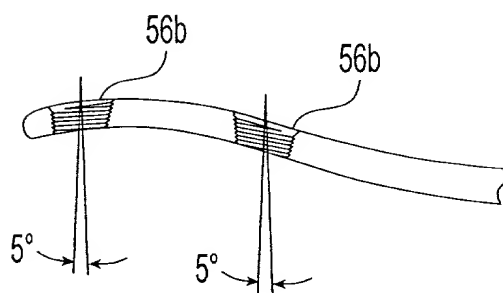


Fig. 18

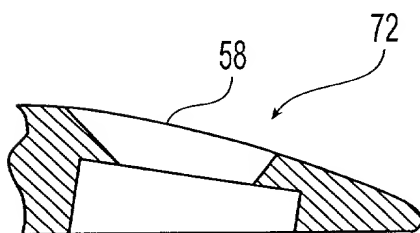


Fig. 19

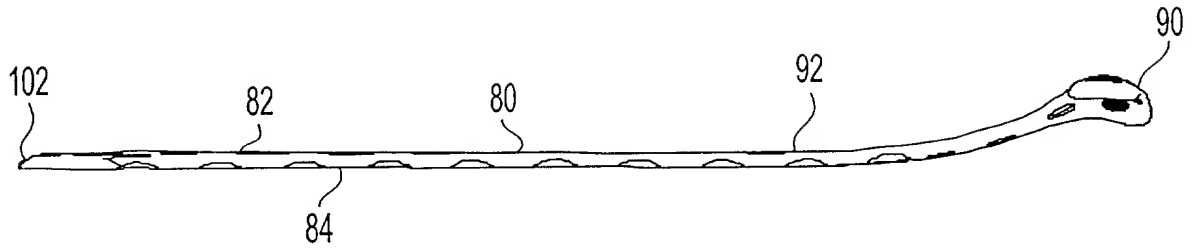


Fig. 20

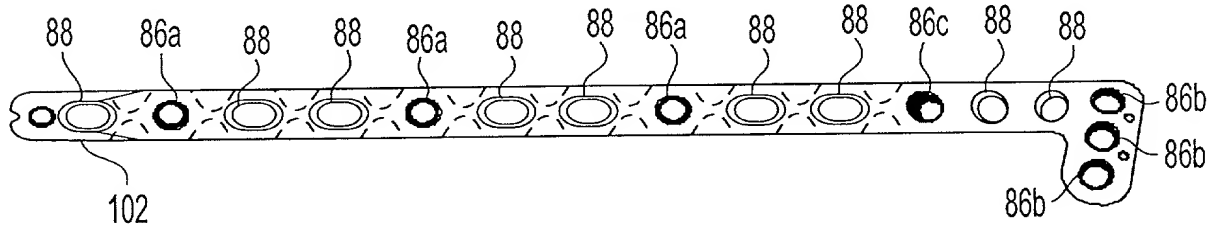


Fig. 21

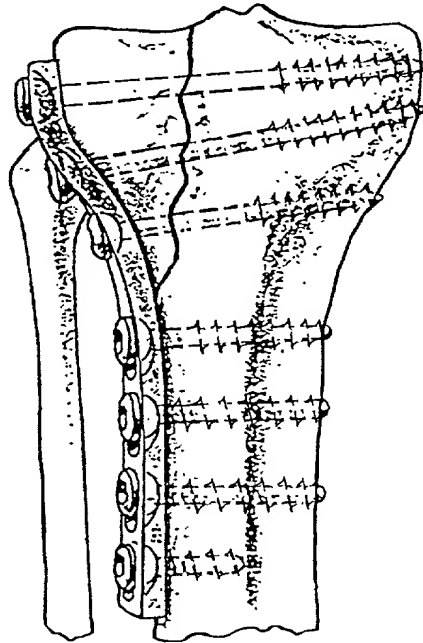


Fig. 22

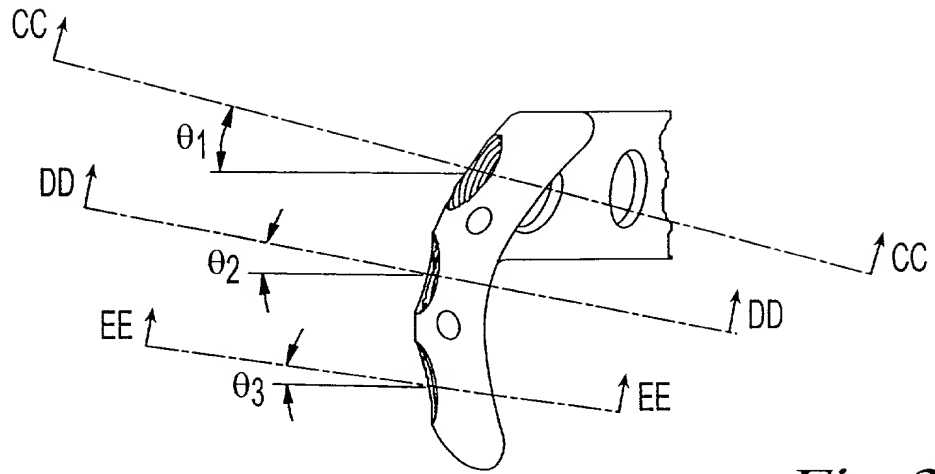


Fig. 23




Fig. 24

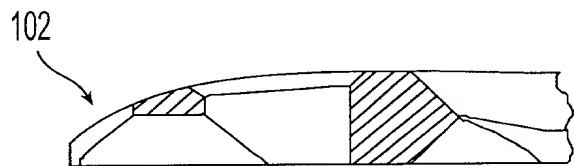


Fig. 25

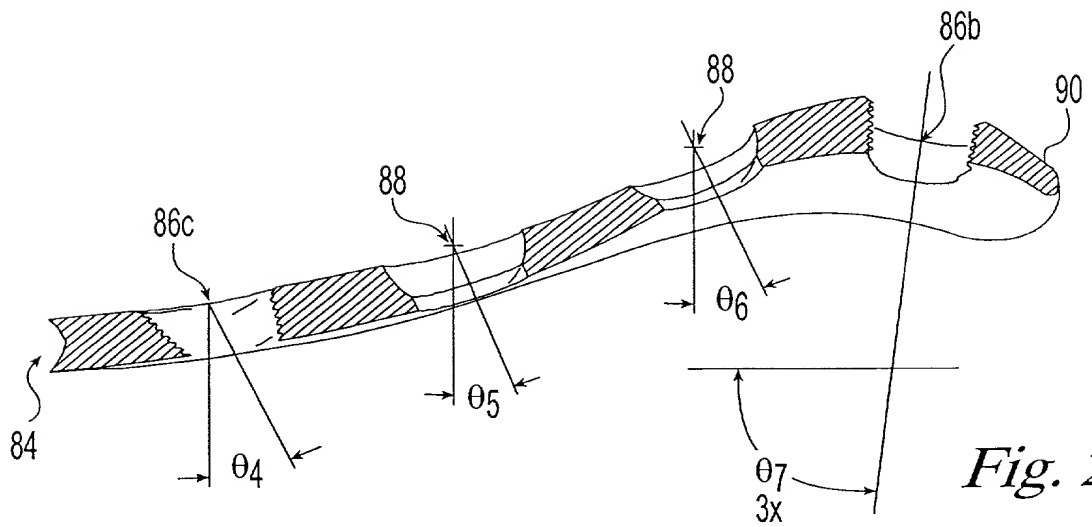


Fig. 26

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below at 201 et seq. underneath my name.

I believe I am the original, first and sole inventor if only one name is listed at 201 below, or an original, first and joint inventor if plural names are listed at 201 et seq. below, of the subject matter which is claimed and for which a patent is sought on the invention entitled

BONE PLATING SYSTEM

and for which a patent application:

☒ is attached hereto

I hereby state that I have reviewed and understand the contents of the above identified application, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

EARLIEST FOREIGN APPLICATION(S), IF ANY, FILED PRIOR TO THE FILING DATE OF THE APPLICATION			
APPLICATION NUMBER	COUNTRY	DATE OF FILING (day, month, year)	PRIORITY CLAIMED
			YES <input type="checkbox"/> NO <input type="checkbox"/>
			YES <input type="checkbox"/> NO <input type="checkbox"/>

☒ I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below.

APPLICATION NUMBER	FILING DATE
60/153,239	September 13, 1999

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NO.	FILING DATE	STATUS		
		PATENTED	PENDING	ABANDONED

POWER OF ATTORNEY: As a named inventor, I hereby appoint S. Leslie Misrock (Reg. No. 18872), Harry C. Jones, III (Reg. No. 20280), Berj A. Terzian (Reg. No. 20060), David Weild, III (Reg. No. 21094), Jonathan A. Marshall (Reg. No. 24614), Barry D. Rein (Reg. No. 22411), Stanton T. Lawrence, III (Reg. No. 25736), Charles E. McKenney (Reg. No. 22795), Philip T. Shannon (Reg. No. 24278), Francis E. Morris (Reg. No. 24615), Charles E. Miller (Reg. No. 24576), Gidon D. Stern (Reg. No. 27469), John J. Lauter, Jr. (Reg. No. 27814), Brian M. Poissant (Reg. No. 28462), Brian D. Coggio (Reg. No. 27624), Rory J. Radding (Reg. No. 28749), Stephen J. Harbulak (Reg. No. 29166), Donald J. Goodeil (Reg. No. 19766), James N. Palik (Reg. No. 25510), Thomas E. Friebe (Reg. No. 29258), Laura A. Coruzzi (Reg. No. 30742), Jennifer Gordon (Reg. No. 30753), Allan A. Fanucci (Reg. No. 30256), Geraldine F. Baldwin (Reg. No. 31232), Victor N. Balancia (Reg. No. 31231), Samuel B. Abrams (Reg. No. 30605), Steven I. Wallach (Reg. No. 35402), Marcia H. Sundeen (Reg. No. 30893), Paul J. Zegger (Reg. No. 33821), Edmond R. Bannon (Reg. No. 32110), Bruce J. Barker (Reg. No. 33291), Adriane M. Antler (Reg. No. 32605), Thomas G. Rowan (Reg. No. 34419), James G. Markey (Reg. No. 31636), Thomas D. Kohler (Reg. No. 32797), Scott D. Stimpson (Reg. No. 33607), Gary S. Williams (Reg. No. 31066), William S. Galliam (Reg. No. 33885), Ann L. Gisolfi (Reg. No. 31956), Todd A. Wagner (Reg. No. 35399), Scott B. Familant (Reg. No. 35514), Kelly D. Talcott (Reg. No. 39582), Francis D. Cerrito (Reg. No. 38100), Anthony M. Insogna (Reg. No. 35203), Brian M. Rothery (Reg. No. 35340), Brian D. Siff (Reg. No. 35679), and Alan Tenenbaum (Reg. No. 34939), all of Pennie & Edmonds LLP, whose addresses are 1155 Avenue of the Americas, New York, New York 10036, 1667 K Street N.W., Washington, DC 20006 and 3300 Hillview Avenue, Palo Alto, CA 94304, and each of them, my attorneys, to prosecute this application, and to transact all business in the Patent and Trademark Office connected therewith.

SEND CORRESPONDENCE TO:		PENNIE & EDMONDS LLP 1667 K Street, N.W. Washington, D.C. 20006		DIRECT TELEPHONE CALLS TO: PENNIE & EDMONDS LLP DOCKETING (202) 496-4721	
201	FULL NAME OF INVENTOR	LAST NAME WEAVER	FIRST NAME Paul	MIDDLE NAME C.	
	RESIDENCE & CITIZENSHIP	CITY Douglassville	STATE OR FOREIGN COUNTRY PA	COUNTRY OF CITIZENSHIP USA	
	POST OFFICE ADDRESS	STREET 345 Blacksmith Road	CITY Douglassville	STATE OR COUNTRY PA	ZIP CODE 19518
202	FULL NAME OF INVENTOR	LAST NAME MAST	FIRST NAME Jeff	MIDDLE NAME W.	
	RESIDENCE & CITIZENSHIP	CITY Grosse Pointe Park RENO	STATE OR FOREIGN COUNTRY MI NV	COUNTRY OF CITIZENSHIP USA	
	POST OFFICE ADDRESS	STREET 64 Pointe Park Place 320 RIVERVIEW CHURCH	CITY Grosse Pointe Park RENO	STATE OR COUNTRY MI NV	ZIP CODE 48230 53840
203	FULL NAME OF INVENTOR	LAST NAME MAYO	FIRST NAME Keith	MIDDLE NAME A.	
	RESIDENCE & CITIZENSHIP	CITY Harrison Township	STATE OR FOREIGN COUNTRY MI	COUNTRY OF CITIZENSHIP USA	
	POST OFFICE ADDRESS	STREET 29820 Riverside Bay Court 3165 AGATE BAY LANE	CITY Harrison Township Bellingham	STATE OR COUNTRY MI WA	ZIP CODE 48045
204	FULL NAME OF INVENTOR	LAST NAME BOLHOFNER	FIRST NAME Brett	MIDDLE NAME R.	
	RESIDENCE & CITIZENSHIP	CITY St. Petersburg	STATE OR FOREIGN COUNTRY FL	COUNTRY OF CITIZENSHIP USA	
	POST OFFICE ADDRESS	STREET 1771 Tanglewood Drive NE	CITY St. Petersburg	STATE OR COUNTRY FL	ZIP CODE 33702
205	FULL NAME OF INVENTOR	LAST NAME LITTLE	FIRST NAME David	MIDDLE NAME	
	RESIDENCE & CITIZENSHIP	CITY West Chester MALVERN	STATE OR FOREIGN COUNTRY PA	COUNTRY OF CITIZENSHIP USA	
	POST OFFICE ADDRESS	STREET P-273, 300 East Evans Street 43 LANDMARK DR.	CITY West Chester MALVERN	STATE OR COUNTRY PA	ZIP CODE 19380 19355
206	FULL NAME OF INVENTOR	LAST NAME	FIRST NAME	MIDDLE NAME	
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP	
	POST OFFICE ADDRESS	STREET	CITY	STATE OR COUNTRY	ZIP CODE

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR Paul C. WEAVER	SIGNATURE OF INVENTOR Jeff W. MAST	SIGNATURE OF INVENTOR Keith A. MAYO
DATE 8/22/00	DATE 8-30-2000	DATE 9-5-00
SIGNATURE OF INVENTOR Brett R. BOLHOFNER	SIGNATURE OF INVENTOR David LITTLE	
DATE 8/24/00	DATE 8/22/00	